


DURAVALVE MODEL V4000 BALL VALVE with Electric Actuator

VALVE FEATURES

- 2-Piece Full Port Stainless Steel
- 1/2" to 3" Sizes
- Maximum Pressure: 1/2" – 1-1/2" Sizes 1000 PSI
2" Size 800 PSI
2-1/2" and 3" Sizes 600 PSI
- Temperature Range: -20° F – 400° F
- Blowout Proof Stem
- ISO 5211 Direct Mounting Pad
- Adjustable "Live Loaded" Stem Seal
- NPT Threads: ASME B1.20.1

ACTUATOR FEATURES

- ISO 5211 Mounting
- Heavy Duty Gears
- Permanently Lubricated
- 2 SPDT Independently Adjustable Switches
- Thermal Overload Protection
- 6 Position Terminal Strip
- Wired for Light Indication

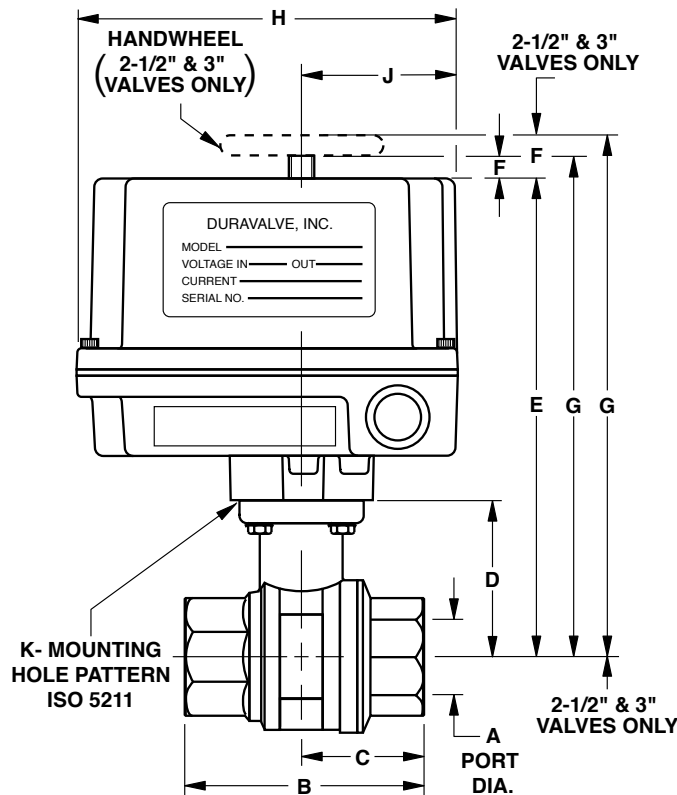

(Dimensions in inches)

Valve Size	Assembly No.	Actuator Model No.	A	B	C	D	E	F	G	H	J	K*
1/2	EA2102	DR-2A 100 In. Lbs.	0.59	2.28	1.14	1.49	6.24	0.38	6.62	5.63	2.31	F03
3/4	EA2103	DR-2A 100 In. Lbs.	0.78	2.56	1.28	1.67	6.42	0.38	6.80	5.63	2.31	F04
1	EA2104	DR-2B 100 In. Lbs.	1.00	3.03	1.52	1.77	6.52	0.38	6.90	5.63	2.31	F04
1-1/4	EA2105	DSR-5 200 In. Lbs.	1.26	3.54	1.77	2.03	7.78	0.50	8.28	6.88	4.44	F05
1-1/2	EA2106	DSR-5 200 In. Lbs.	1.50	3.86	1.93	2.34	8.09	0.50	8.59	6.88	4.44	F05
2	EA2107	DSX-5 300 In. Lbs.	1.97	4.67	2.34	2.70	9.55	1.75	11.30	7.00	4.63	F07
2-1/2	EA2108	DML-15 1000 In. Lbs.	2.52	6.14	3.07	3.88	10.62	1.75	12.37	7.00	2.38	F07
3	EA2109	DMH-30 1500 In. Lbs.	3.00	7.32	3.66	4.25	13.56	1.75	15.31	10.00	5.00	F07/F10

* K-ISO 5211

